



VIGILANT MX1

Fire Detection and Alarm System

- Greater Connectivity, Lesser Complexity
- Panel to Panel IP Networking
- ActivFire Listed
- Get Up and Running in Seconds
- Open Protocol
- Freedom to Choose
- 100 Years of Excellence
- Designed with the Future in Mind
- Saves You Time and Hassle
- Smarter Detection, Smaller Footprint

In-Built Intelligence

The VIGILANT MX1 fire detection and alarm system is the panel of choice for virtually every application. It is simple to use, cost-effective, and offers a range of advanced features commonly found in only large and complex systems.

The MX1 supports MX VIRTUAL analogue addressable detectors such as the 814PH (Smoke & Heat) and 814CH (CO & Heat) fire detectors.

Each of these detectors incorporates multiple sensors which may operate independently, or may be used in heat enhancement mode for faster response to a flaming fire, allowing optimum detection with the best nuisance alarm suppression.

Detection Technology For Every Application

For specific applications, single-sensor MX analogue addressable photoelectric smoke detectors, high sensitivity smoke detectors (VESDA), heat-only detectors, flame detectors and intrinsically safe Ex rated devices are also available.

The MX DIGITAL communications protocol used on the addressable loops is designed to provide high reliability and fault tolerance, with operation possible over many cable types. This often permits system upgrades using existing cable.

For large areas, or diverse layout applications, networking of up to 250 MX1 panels is possible. This provides enormous scope for system expansion across one, or multiple sites.

Non-Proprietary Interfaces


The VIGILANT MX1 can be serviced, installed, and programmed by any company whose technicians have undertaken training provided by Johnson Controls.

Access to our programmers is safeguarded, ensuring only qualified personnel modify these important life safety systems, while allowing flexibility of choice for the end user in the service company they select.



Networking Made Easy

Powered by the Smart
MX1 TECHNOLOGY

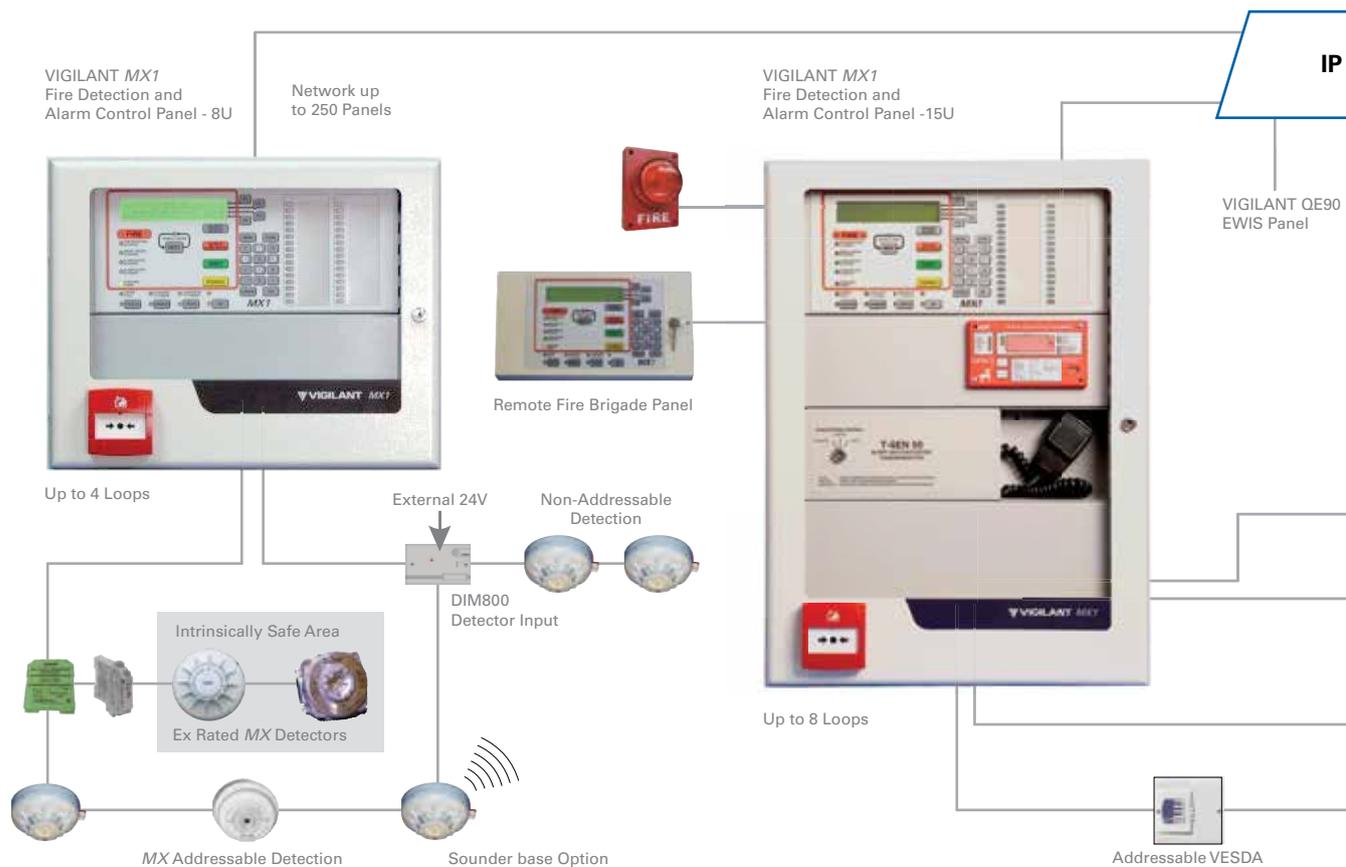

Easy to Operate

Operation is straightforward as the VIGILANT MX1 4-line x 40 character alphanumeric display provides clear alarm information including zone and point numbers, type of alarm, and a description of the alarm location. The display allows easy scrolling through the 99 event alarm buffer. Current faults, disabled zones/points, and tests in progress can also be separately recalled. A non-volatile history log stores the previous 999 events, which can be recalled to the LCD.


Easy to Program

The task of programming the MX1 is made straightforward by SmartConfig, a WINDOWS based programming tool with templates that preset most of the settings to the correct values. Using commands via the front panel keypad, the MX1 lists all the devices found on a specific MX loop, and will detect and help identify the location of a break or short in that loop. The list of MX points can be captured and imported directly into SmartConfig, further streamlining the programming and pre-commissioning process.

Selectable profiles such as Residential, Day/Night, Flow Switch, etc., simplify the programming of complex functions and further enhance the MX1's programmability. Powerful user-programmable Boolean logic with special functions and timers; programmable outputs for warning devices; and ancillary controls makes the MX1 configurable to almost any fire detection requirement. The panel's site-specific database is duplicated, reducing downtime and increasing reliability.

Detection algorithms can be programmed for each detector to allow the detection capabilities of the system to be further optimised.

MX FASTLOGIC is a fuzzy-logic expert rule-based algorithm applied to the photoelectric smoke signal with optional heat enhancement. It is designed to discriminate between the smoke and temperature patterns of real fires and typical causes of nuisance alarms.

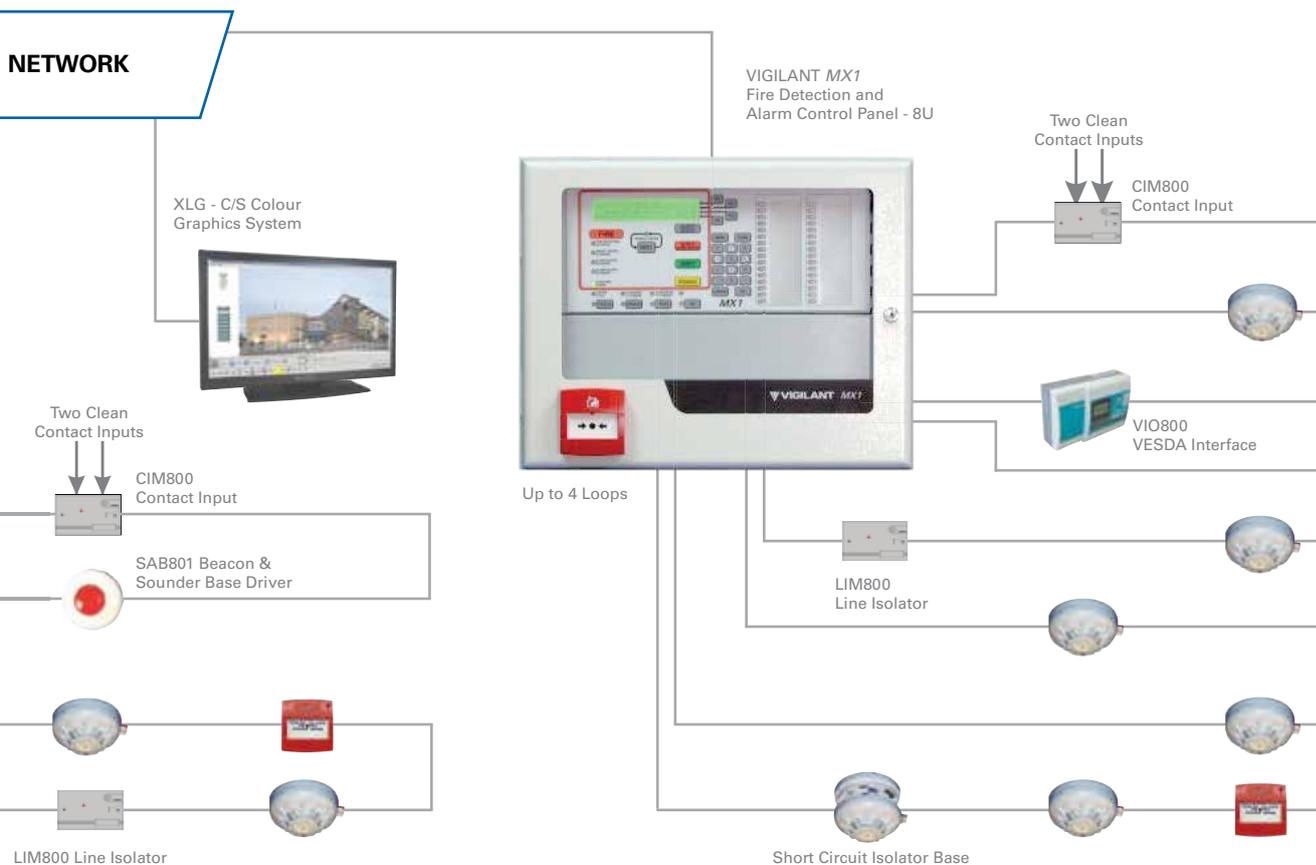

SMARTSENSE is a field-proven, reliable detection algorithm, providing nuisance alarm reduction, compensation for ambient conditions and a wide range of programmable sensitivity settings. Both algorithms provide:

- Detector pre-alarm sensing for early warning of a potential alarm
- Compensation for soiling and changes in ambient conditions
- Logging "detector dirty alert" when compensation limits are about to be exceeded, to highlight the need for maintenance to be carried out
- Heat sensor able to be programmed to act independently as a heat detector.

Easy to Maintain

Whilst the MX1 requires minimum maintenance, it has been designed to allow the requirements in AS 1851 'Maintenance of Fire Protection Systems & Equipment' to be carried out quickly and efficiently.

The in-built battery testing and power supply monitoring will identify battery problems, should they occur.

The sensitivity and condition of smoke and CO detectors can be displayed or downloaded to a PC. Outputs can be operated from the keypad to test interfaces to other systems.

To simplify replacement of dirty or faulty detectors, an unaddressed replacement is automatically addressed when it replaces a disabled detector on the MX loop.

An Auxiliary MX Loop connection is provided on the MX1 Controller to check and re-address detectors.

The Auto Reset mode allows detectors to be tested by one person. Commissioning mode speeds up system testing by bypassing filtering delays and algorithms. Individual detectors can be easily located in the field by forcing the LED indicator on.

Specifications

System Capacity		
Analogue Loop	MX DIGITAL, 2-wire, 2km max., O/C tolerant, S/C isolators	
Addressable points	Up to 250 per MX Addressable loop, 8 loops in total, 2000 MX devices	
Zone indications	Optional, up to 32 using control panel, 192 total with extra modules. Separate alarm LED, combined Fault/ Disable LED. Up to 999 zones total.	
Remote FBP	One Remote Fire Brigade Panel (RFBP)	
Networking	Up to 250 MX1 panels in total over IP, using a dedicated LAN or existing LAN. I-HUB: ring arrangement of up to 64 panels using 2-core or fibre optic cable PIB: ring/star arrangement of up to 64 panels over IP using 2-core or fibre optic cable. I-HUB and PIB rings can be combined for larger networks. Note: Not all network configurations are Standards-compliant or ActivFire listed.	

Physical	15U Cabinet	8U Cabinet
Cabinet Style	15U 19 inch Rack, IP30	8U 19 inch Rack IP30
Cabinet Size (mm)	750H x 550W x 210D	440H x 550W x 210D
Cabinet Material	1.2mm Mild steel, zinc coated	1.2mm Mild steel, zinc coated
Finish	Baked epoxy powdercoat finish, DULUX® Titania Ripple	
Style	Surface or inset wall mounting.	
Shipping Weight	24kg (approx.)	17kg (approx.)
Temperature	0°C to +45°C operating (tested to +55°C, as per AS 7240.2)	
Humidity	Up to 95% RH at 40°C (non-condensing)	

Power Supply

Mains Supply	230Vac (192–253Vac), 1.2A rms, 50/60Hz	
Internal Battery	2 x 12V SLA up to 40Ah	2 x 12V SLA up to 17Ah
Internal PSU	27.3V (nominal), 5A regulated, temperature-compensated	
Battery Monitoring	Battery low/ fail, supervision of battery connection and condition	
Fused Outputs	3 x +VBF, +VRZDU, +VNBF, all fused 3A (slow-blow), supervised	
Current Consumed	150mA (Base panel, system normal)	

Inputs

MX Loop	Up to 250 MX detectors and input/output modules per loop. Total of 2000 MX devices	
MX Loop Card(s)	Optional card adds up to 250 MX detectors and I/O modules. Up to 8 loops maximum (15U) Up to 4 loops maximum (8U)	
Other Inputs	Two programmable supervised, transient protected inputs at control panel for sprinkler evacuation, etc. Unused relay supervision inputs may also be used for external wiring. Sixteen programmable unsupervised inputs available for internal (cabinet) use	

Outputs

Monitoring Service	Alarm, Fault, Disable: clean-contact changeover relays ASE port: 2-wire connection to Centaur ASE	
MX Loop	Up to 1A loop power. The 5A p.s.e. will provide up to 3A total MX Loop pwr.	
Ancil. Relay 1	2A, 30Vdc resistive. Programmable operation; pre-configured for T-GEN 50	
Ancil. Relay 2	2A, 30Vdc resistive. Voltage free changeover contacts or load-supervised switched 24V. Programmable operation	
Ancil. Relay 3	5A, 30Vdc resistive. Voltage free changeover contacts or reverse polarity supervision of diode isolated loads. Up to 3 branches. Programmable operation suitable for Occupant Warning System (OWS) with Mini-Gens/Strobe Driver	
GP Output1 & 2	500mA transistor pulldown (1.1V). Transient protected for field wiring Programmable operation, load supervised. Can be used for supervised inputs	
Other Outputs	16 x 50mA unsupervised unprotected transistor pulldown (1.1V) Programmable operation for panel indicators or relay outputs	
RZDU Comms	Comms port for connection to repeater panels or HLI to QE90 and/or IO-NET	
Printer/ Program	2x RS232, male DB9 configured as DTE	

Device Compatibility

MX1 is compatible with the range of VIGILANT MX analogue addressable detectors and I/O modules including:
- 850PC CO/Photo/Heat detector
- 850PH Photo/Heat detector
- 850P Photo detector
- 850H Heat detector
- 801PC CO/Photo/Heat detector
- 814PH Photo/Heat detector
- 814P Photoelectric detector
- 814CH CO/Heat detector
- 814H Heat detector
- 801F Flame detector
- S271i+ I.S. Triple IR Flame detector
- S271f+ Triple IR Flame detector
- 801Ex series I.S. detectors & MCP
- IF800Ex I.S. Single Input Device
- VLC-800MX VESDA Smoke detector
- CP820 Manual Call Point
- CP830 IP67 Manual Call Point
- MCP820 Isolator Manual Call Point
- MCP830 Isolator IP67 Manual Call Point
- CIM800 Contact Input Module
- DIM800 Dual Detector Input Module
- LPS800 Loop Powered Sounder driver
- SAB801 Sounder/Relay base driver with LED Beacon
- SAM800 Sounder/Relay base driver
- SIO800 Single Input/Output Module
- MIM800 Mini Input Module
- MIM801 Mini Input Module (NC)
- MIO800 Multi-I/O Module (3 in, 2 out)
- RIM800 Relay Interface Module
- SNM800 Sounder Notification Module
- LIM800 Line Isolator Module (3 port)
- 5BI Isolator base
- 814RB Relay base
- 802SB Sounder base (Loop powered)
- 901SB Sounder base (external power)

Approved

MX1 is certified to AS 7240.2 – 2004 and AS 7240.4 – 2004: "Fire detection and alarm systems"; AS 4428.3 – 2004: "Fire detection, warning, control and intercom systems – Control and indicating equipment – Fire brigade panel"; and AS 4428.10 – 1998: "Fire detection, warning, Control and intercom systems – Alarm investigation".

ActivFire Listed afp-2320

Australia Level 3, 95 Coventry Street Southbank VIC 3006 Tel: 1300 725 688 Tel: +61 3 9313 9700 Email: tfppcustservice.au@tycofp.com

New Zealand 17 Mary Muller Drive Hillsborough PO Box 19-545 Woolston Christchurch 8241 Tel: +64 9 635 0617 Email: tsp.sales.nz@tycofp.com

VIGILANT, a respected regional brand of Johnson Controls, is a technology leader in the Australian and New Zealand fire detection markets with AS and NZS product approvals. The VIGILANT product line includes a comprehensive range of MX TECHNOLOGY fire detection products and the market-leading QE90 voice evacuation systems. VIGILANT product is widely supported throughout Australia and New Zealand by a network of installation companies, service companies and distributors.

© 2017 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

MX1A UdatVIG1710 October 2017

www.vigilant-fire.com.au

